



➔ Removing the cover

10. Press the release button in the middle the harness buckle to disconnect.
11. Remove waist belt from harness connectors.
12. Pull belts out through button holes in seat cover. The cover can now be easily taken off the seat for cleaning or replacing.
13. To replace seat cover, repeat steps 10 - 12 in reverse.

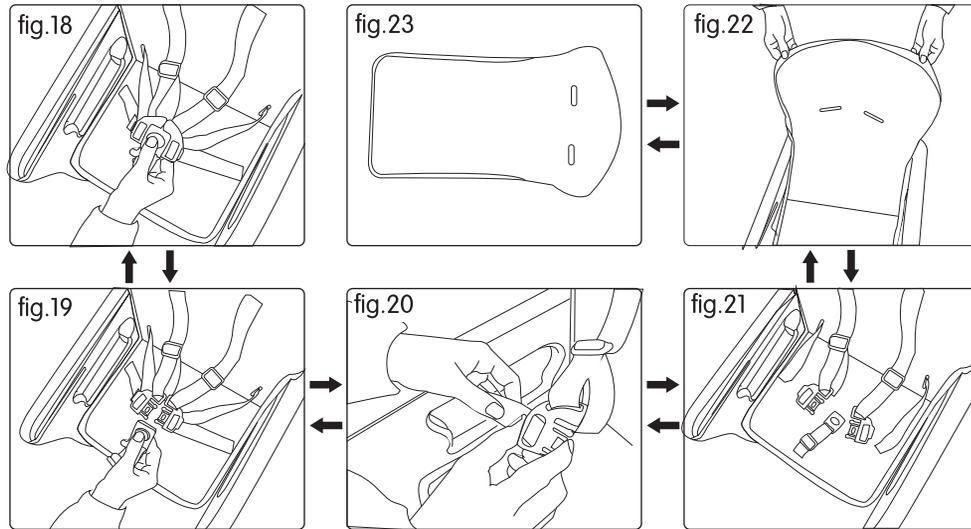

➔ Status when using as table and chair

➔ operating instructions



Fitting your child into the chair

1. Sit you child in the chair after assembling.
2. Fasten harness buckles
3. Tighten waist and shoulder belts to appropriate length.
4. Attach adjustable tray.


⚠ Warning

1. Do not use until your child can sit independently.
2. Do not use if any parts are broken, missing or faulty in anyway.
3. Do not use until all parts are correctly assembled & adjusted.
4. It is extremely dangerous to place the high chair near the fire, heating appliance, such as electric welding and gas heater. **DO NOT DO IT.**
5. Always secure the child in the restraint with the harness supplied to prevent serious injury or death from falls or sliding out. Never leave child without adult attendance.
6. Do not alter or modify this product.
7. Always use on a level secure surface.
8. Ensure all four legs of the low-chair are inserted correctly and sit level.

INFA SECURE PTY LTD P.O. Box 487, Emu Plains NSW 2750, 110-114 Old Bathurst Rd, Emu Plains 2750 **Service No:** 02 4728 8090 **Fax:** 02 4728 8040 **www.infa-secure.com.au**

 **infa-secure**
baby products with a difference

588
FEED 'N' READ
4 in 1 hi/low-chair
INSTRUCTION MANUAL

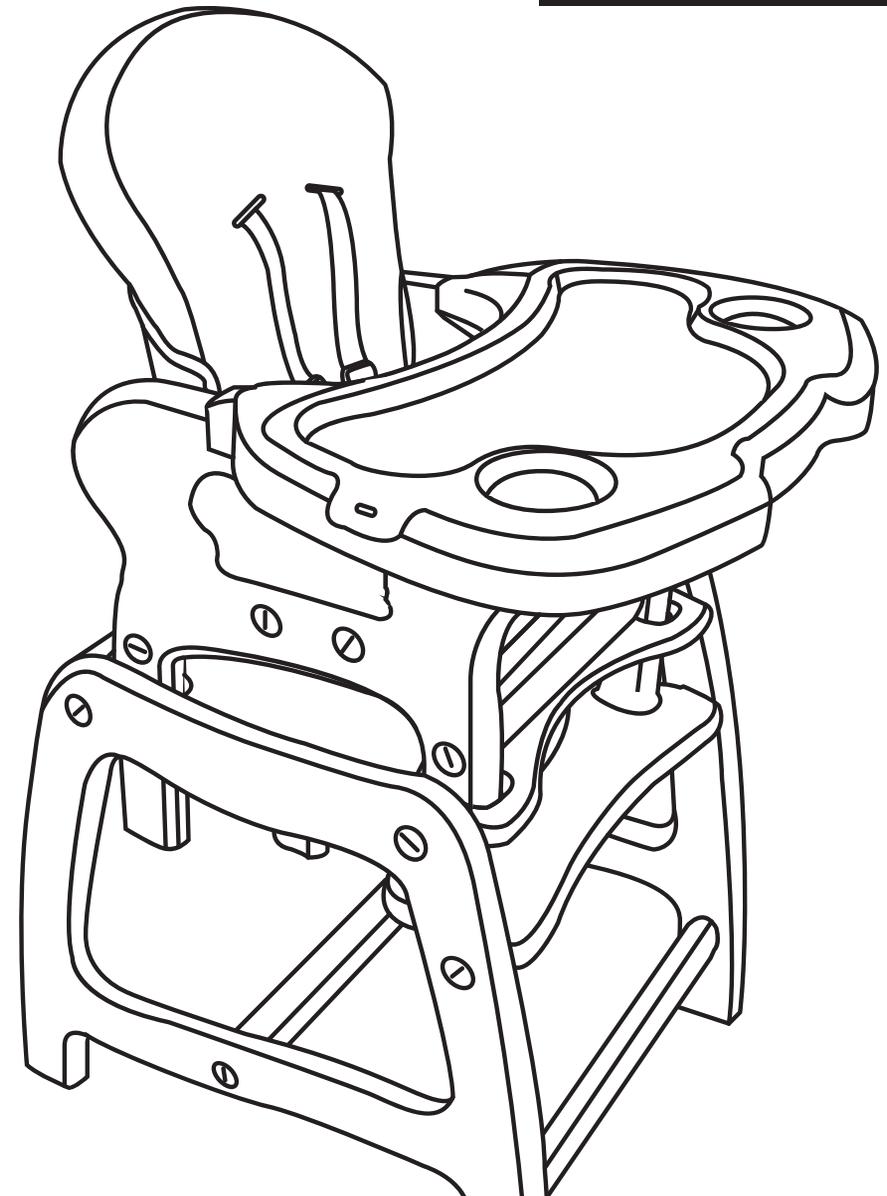


➔ Instruction

Important-Retain for future reference, read all the instructions carefully before use.
Follow instructions for assembly.


Suitable from 6 months to 7 years; If the child is less than 18kgs child must be able to sit independently before using this chair. It could be used as a table after 3 years years old.

➔ Major parts name:

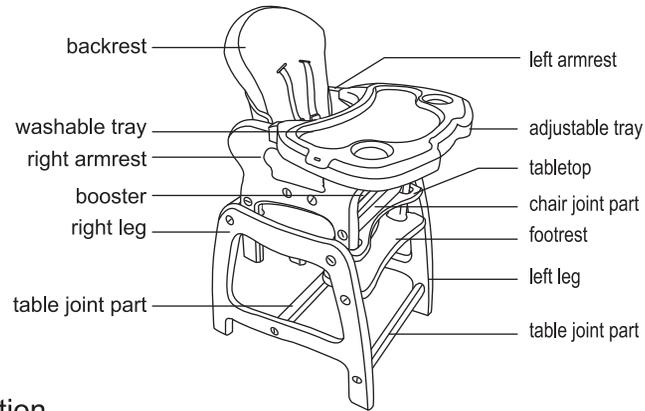



➔ Installation

Assemble the backrest and booster




1. Join Backrest and booster together to create reclining hinge and place hinge bolt into axle holes. (fig.1)


Assemble the booster / backrest & armrest

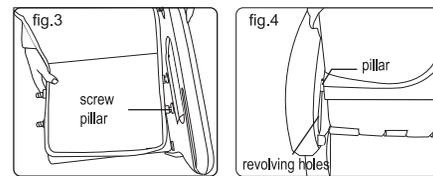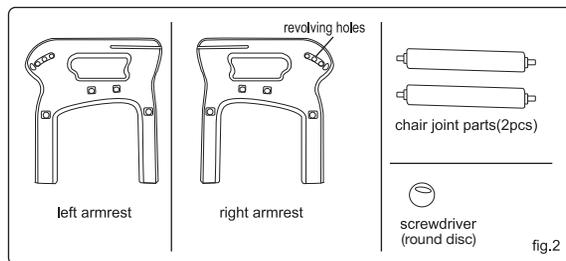

2. Put the two screw pillars, on the booster, into the corresponding holes in the left chair armrest. (fig. 3)
3. Put the backrest pillars into the corresponding revolving holes in armrest. (fig.4)

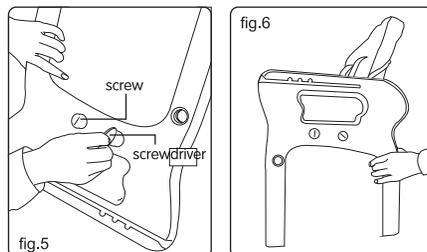


4. Insert screws through armrest into booster, using the screwdriver tighten until locked (fig.5 & 6)

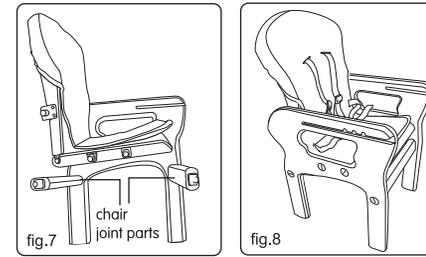


5. Insert the two chair joint parts into the corresponding holes. Please note: the shape of the protruding ends on the chair joints, matches with the holes in the armrests (fig. 7). Then attach right armrest as per steps 3 & 4.

Assemble the table

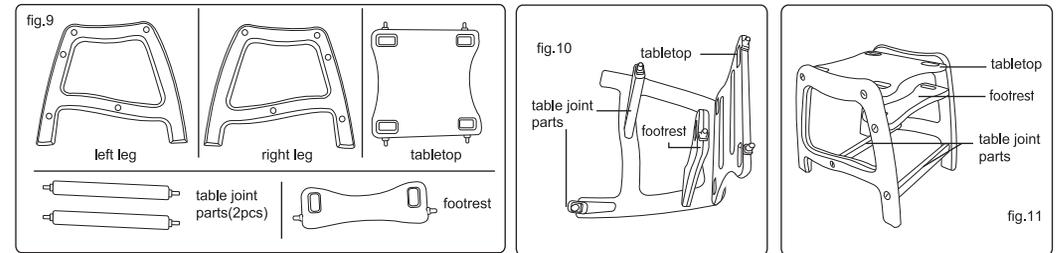


6. Insert the table top, table joint parts and footrest into the corresponding holes in the left and right table legs (fig. 10 & 11). Insert screws and tighten until locked.

Assemble the chair and low chair

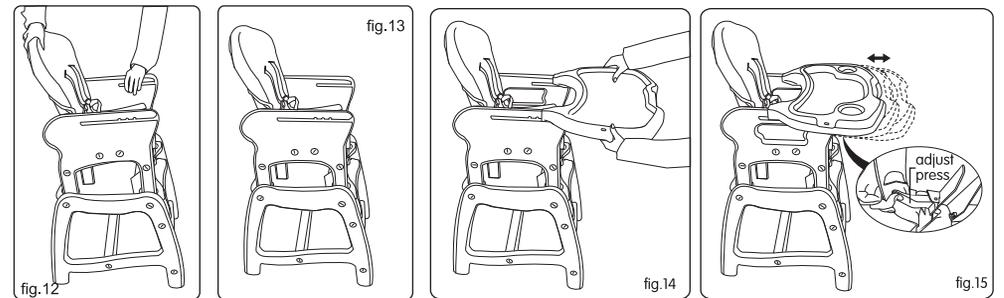


7. Insert chair legs into corresponding holes in the table top.

➔ Adjust the backrest



8. Slide tray into notches located on the outside of the armrests. A click can be heard when the tray is locked into place. To remove tray or move to another position press the adjuster levers on the underside of tray. The tray can be adjusted to 3 positions.



9. The backrest can be adjusted to 3 positions. To adjust backrest, pull up gently on the adjuster button on the back of backrest and move into the desired position.